


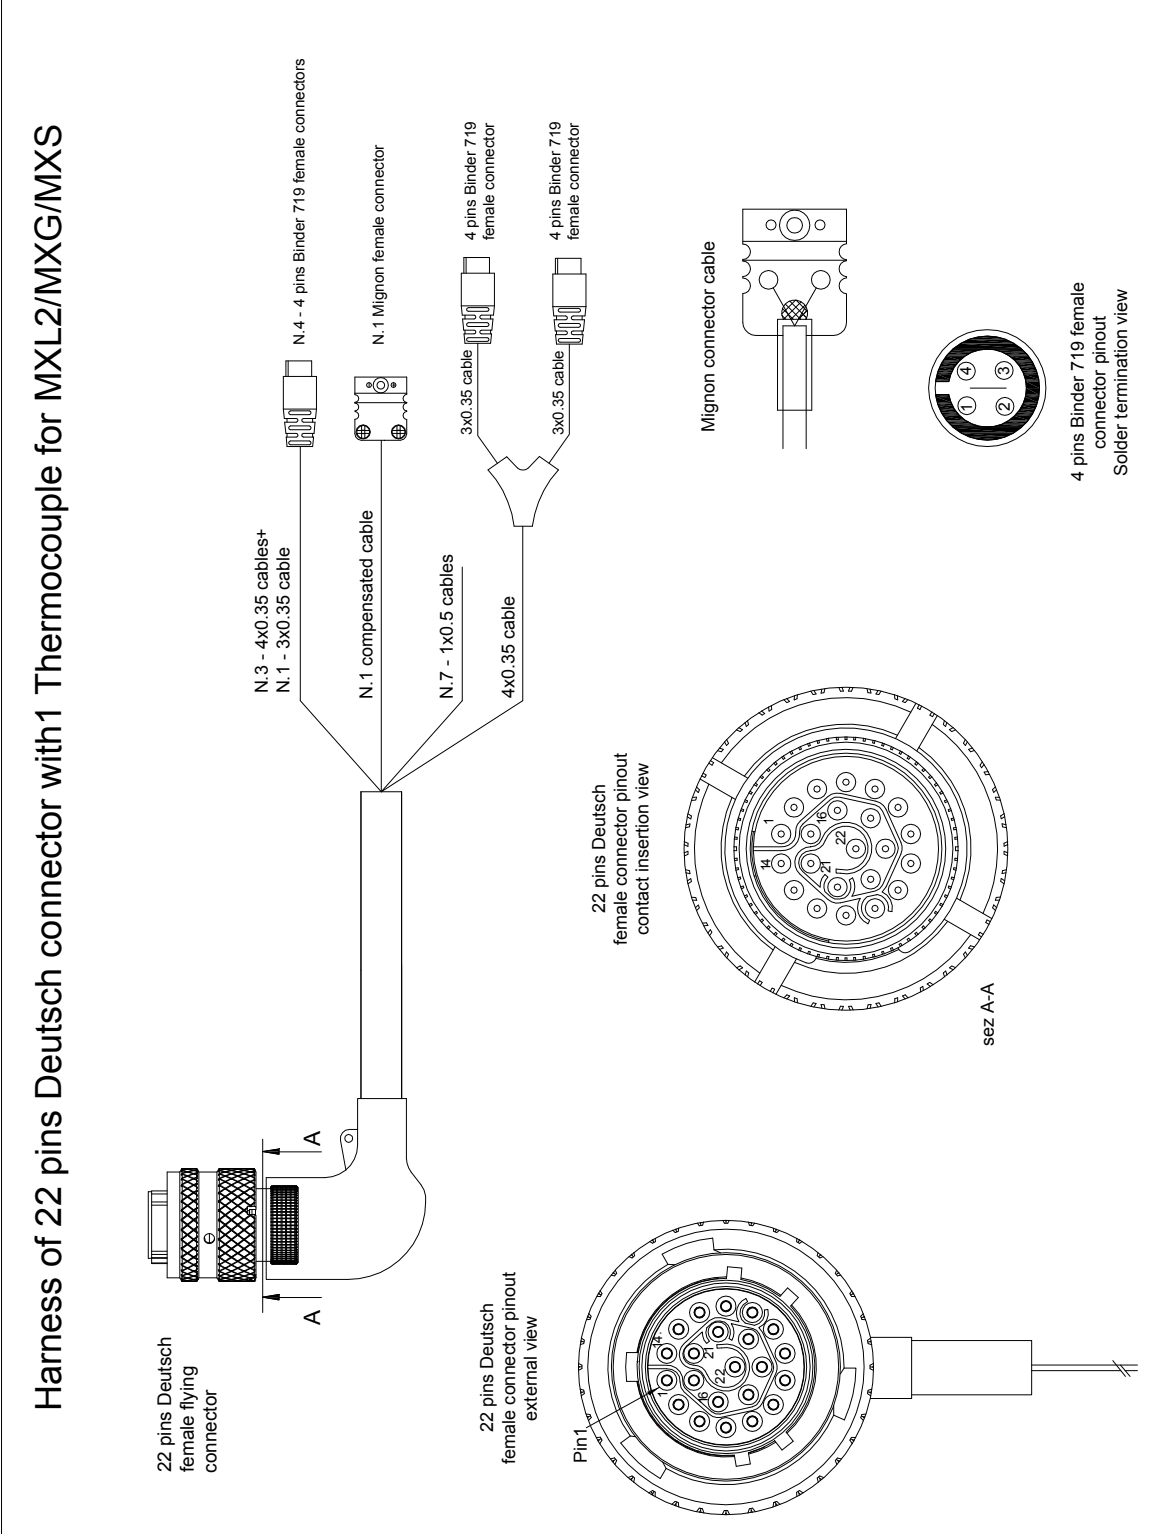

| N.rev. / Rev. N. | Descrizione / Description | Data / date | Firma / Sign | Contr. da / Ckd. by | |
|---|---------------------------|--|-----------------------|--------------------------|---------------|
| <p style="text-align: center;">Harness of 22 pins Deutsch connector with 1 Thermocouple for MXL2/MXG/MXS</p>  | | | | | |
| Rif. / Ref. | Q.tà / Q.ty | Materiale / Material | | N. articolo / Item N. | |
| Progettato da / Designed by | Contr. da / Ckd. by | Approvato da / Approved by | Nome file / File name | Data / Date | Scala / Scale |
|  | | Titolo / Title Cablaggio connettore Deutsch 22 pin con 1 Termocoppia per MXL2/MXG/MXS | | | |
| | | N. disegno / Drawing N. 04.573.08 | Rev. / Rev. 2 | Foglio / Sheet 1 of 2 | |

| | | | | |
|------------------|---------------------------|-------------|--------------|---------------------|
| N.rev. / Rev. N. | Descrizione / Description | Data / date | Firma / Sign | Contr. da / Ckd. by |
|------------------|---------------------------|-------------|--------------|---------------------|

| Table of cables ending with 4 pins Binder 719 female connectors | | | | | | |
|---|-------------------------------|----------------------|-----------------------|--|---|------------------------|
| 22 pins Deutsch connector pin | Cable colour | Binder connector pin | Cable type | Length | Channel | Label |
| 5 2 3 4 | White Black Red Blue | 1 2 3 4 | 4x0.35mm ² | 380 mm | Analog channel 6 GND Vbattery Vreference | Channel 6 |
| 6 7 8 9 | White Black Red Blue | 1 2 3 4 | 4x0.35mm ² | 400 mm | Analog channel 7 GND Vbattery Vreference | Channel 7 |
| 10 7 8 9 | White Black Red Blue | 1 2 3 4 | 4x0.35mm ² | 400 mm | Analog channel 8 GND Vbattery Vreference | Channel 8 |
| 11 12 13 | White Black Blue nc | 1 2 3 4 | 3x0.35mm ² | 320mm | Speed 2 GND Vbattery nc | Speed 2 |
| 22 pins Deutsch Connector pin | | ALC-02 board Side 1 | | 4 pins Binder 719 female connector pin | | |
| | | | | 1 Speed 3 2 GND 3 Vbattery 4 nc 4 nc 3 Vbattery 2 GND 1 Speed 3 | | Speed 3 Speed 4 |

| Table of cables ending with Mignon connector | | | | | | |
|--|---------------|----------------------|-------------|--------|-------------------------|-----------|
| 22 pins Deutsch connector pin | Cable colour | Binder connector pin | Cable type | Length | Channel | Label |
| 1 2 | Yellow Red | + - | compensated | 380 mm | Analog channel 5 GND | Channel 5 |

| Table of not cabled cables | | | | |
|-------------------------------|---|--|--------|---|
| 22 pins Deutsch connector pin | Cable colour | Cable type | Length | Label |
| 19 20 | White Blue | 1x0.5mm ² 1x0.5mm ² | 550mm | Digital output 1 Digital output 2 |
| 17 18 16 21 22 | White Blue Black Blue White | 1x0.5mm ² 1x0.5mm ² 1x0.5mm ² 1x0.5mm ² 1x0.5mm ² | 550mm | CAN2+ CAN2- GND RS232TX RS232RX |

| | | | | | |
|---|---------------------|--|-----------------------|-----------------------|--------------------------|
| Rif. / Ref. | Q.tà / Q.ty | Materiale / Material | | N. articolo / Item N. | |
| Progettato da / Designed by | Contr. da / Ckd. by | Approvato da / Approved by | Nome file / File name | Data / Date | Scala / Scale |
|  | | Titolo / Title Cablaggio connettore Deutsch 22 pin con 1 Termocoppia per MXL2/MXG/MXS | | | |
| | | N. disegno / Drawing N. 04.573.08 | | Rev. / Rev. 2 | Foglio / Sheet 2 of 2 |