

AiM pressure sensor 0-150 PSI

AiM 0-150 PSI pressure sensor is suitable for oli and fuel pressure reading, being able to read pressures up to 150 PSI.

The sensor **part number** is:

0-150 PSI 1/8 NPT X05PSA00150P18



Technical characteristics

Supply 8-16 V

< +/- 0.5% FS (CLNH – combined non-linearity and hysteresis) Accuracy

500 mV/ 0 PSI Characterisation 4500 mV/ 150 PSI

< 10 mAConsumption

from -20°C to 135°C Temperature working range


Sealing **IP66**

316 stainless steel Housing


Weight 30 g Cable length 400 mm **Thread** 1/8 NPT



Drawings and pinouts

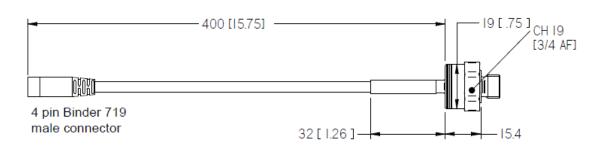






Binder connector - Sensor side



Binder connector - Harness side



Pin		
1		
2		
3		
4		

Function
Analog signal
GND
+Vb
Not connected

Cal	ole coloi
Wh	ite
Bla	ck
Rec	ł



Extension cables

For this sensor connector, standard length extension cables are available, whose part number changes according to their length and to the product the sensor is to be connected to.

Extension cable for connection to:

- MXG/MXG 1.2/MXG 1.2 Strada
- MXS/MXS 1.2/MXS Strada/MXS 1.2 Strada
- MXP/MXP Strada
- MXL2
- MXm
- EVO5
- MXL Strada/Pista/Pro05

Part numbers:

V02PCB05B - cable length: 500mm V02PCB10B - cable length: 1000mm V02PCB15B - cable length: 1500mm V02PCB20B - cable length: 2000mm V02PCB25B - cable length: 2500mm V02PCB30B - cable length: 3000mm

Extension cable for connection to:

- Channel Expansion
- EVO4
- EVO4S

Part numbers:

V02PCB05BTXG - cable length: 500mm V02PCB10BTXG - cable length: 1000mm V02PCB15BTXG - cable length: 1500mm V02PCB20BTXG - cable length: 2000mm V02PCB25BTXG - cable length: 2500mm V02PCB30BTXG - cable length: 3000mm



