

AiM Infotech

Aprilia RSV4 and RSV4 APRC

Release 1.03



ECU



1

Bike years and models

This tutorial explains how to connect Aprilia RSV4 ECU to AiM devices. Supported models and years are:

- Aprilia RSV4 Factory 2009-2010
- Aprilia RSV4 R 2009-2010
- Aprilia RSV4 APRC (Aprilia Performance Ride Control) 2011

2


CAN bus connection

Aprilia RSV4 ECU is equipped with a CAN communication protocol used to communicate parameters to an external logger. You can connect AiM devices to the ECU through the stock dashboard rear connector or directly. The first connection is easier to reach.


2.1

Stock dashboard connection

To reach Aprilia RSV4 stock dash rear connector remove the dash and see a 40 pins female connector shown here below.

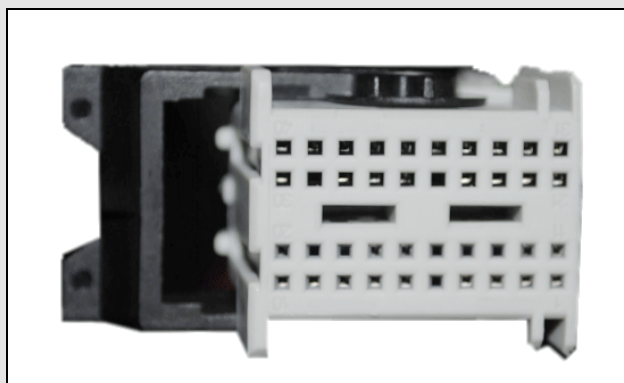

Below you see stock dash connector as well as the connection table.

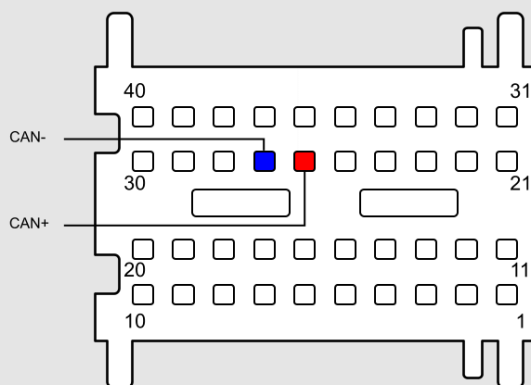


40 pins connector pin	Pin function	Aprilia cable colour	AiM cable label
26	CAN+	Orange	CAN+
27	CAN-	White/Black	CAN-

2.2

ECU direct connection

Aprilia RSV4 ECU is equipped with two connectors called ECU1 (engine) and ECU2 (vehicle). The CAN bus is on ECU2 connector, placed right of the fuel tank. Here below it is shown with its pinout and the connection table.

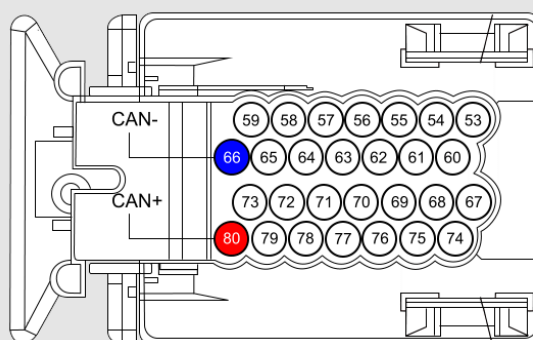

Dash connector pin	Pin function	Aprilia cable colour	AiM cable label
80	CAN+	Orange	CAN+
66	CAN-	White/Black	CAN-

3

AiM Logger configuration

Once the ECU connected to the logger set up the logger as follows:

Run Race Studio 2 software and follow this path:

- Device Configuration → Select the device you are using;
- select the configuration or press "New" to create a new one;
- select ECU manufacturer "Aprilia" and ECU Model
 - "RSV4" for Aprilia RSV4 Factory 2009-2010 and Aprilia RSV4 R 2010
 - "RSV4_APRC" for Aprilia RSV4 APRC 2011
- transmit the configuration to the device pressing "Transmit".

4

Available channels

Channels received by AiM devices connected to Aprilia ECU change according to the protocol you set in Race Studio 2 software.

4.1

Aprilia "RSV4" protocol

Channels received by AiM devices connected to Aprilia RSV4 using "RSV4" protocol are:

ID	CHANNEL NAME	FUNCTION
ECU_1	RSV4_RPM	Rpm
ECU_2	RSV4_SPEED	Speed
ECU_3	RSV4_GEAR	Gear number
ECU_4	RSV4_SEL_MAP	Selected MAP: 1 = "T" Track/race 2 = "S" Sport 3 = "R" Road
ECU_5	RSV4_NEUTRAL	Neutral led
ECU_6	RSV4_WARNING	Warning Led
ECU_7	RSV4_SIDE STAND	Side stand led
ECU_8	RSV4_ENG_TEMP	Engine cooling temperature
ECU_9	RSV4_V_BATT	V Battery
ECU_10	RSV4_FUEL_LOW	Low fuel level

4.2

Aprilia “RSV4_APRC” protocol

Channels received by AiM devices connected to Aprilia RSV4 using “RSV4_APRC” protocol are:

ID	CHANNEL NAME	FUNCTION
ECU_1	RSV4_RPM	RPM
ECU_2	RSV4_BK_SPEED	Bike speed
ECU_3	RSV4_GEAR	Engaged gear
ECU_4	RSV4_SEL_MAP	Selected Map
ECU_5	RSV4_NEUTRAL	Neutral signal
ECU_6	RSV4_WARNING	Warning led
ECU_7	RSV4_SIDE STAND	Side stand led
ECU_8	RSV4_ENG_TEMP	Engine cooling temperature
ECU_9	RSV4_V_BATT	V battery
ECU_10	RSV4_FUEL_LOW	Low fuel level
ECU_11	RSV4_YAW_RATE	Yaw rate
ECU_12	RSV4_ROLL_RATE	Rolling rate
ECU_13	RSV4_ACC_LAT	Lateral accelerometer
ECU_14	RSV4_ACC_LONG	Longitudinal accelerometer
ECU_15	RSV4_THRT_HAND	Throttle handle
ECU_16	RSV4_WH_SPD_F	Front wheel speed
ECU_17	RSV4_WH_SPD_R	Rear wheel speed
ECU_18	RSV4_TC_CTRL	ATC – Aprilia Traction Control level
ECU_19	RSV4_WHEEL_C	AWC – Aprilia Wheel control
ECU_20	RSV4_LAUNCH_C	ALC – Aprilia Launch control
ECU_24	RSV4_TPS1	Throttle position 1
ECU_25	RSV4_TPS2	Throttle position 2
ECU_27	RSV4_TC_INT	Traction control intervention

Please note: throttle position may or may not come across in the CAN data stream due to an update by the manufacturer.