

AiM Infotech

Triumph Daytona 675 ECU

Release 1.03



1 Bike years

This tutorial describes how to connect AiM devices to Triumph Daytona 675 bike. Supported years are:


- Triumph Daytona 675 from 2013 onwards.

2 CAN bus connection

Triumph Daytona 675 bike features a data communication bus based on CAN on the OBDII connector. The plug is under the bike seat as shown here below.



The image below shows OBDII connector pinout and connection table.

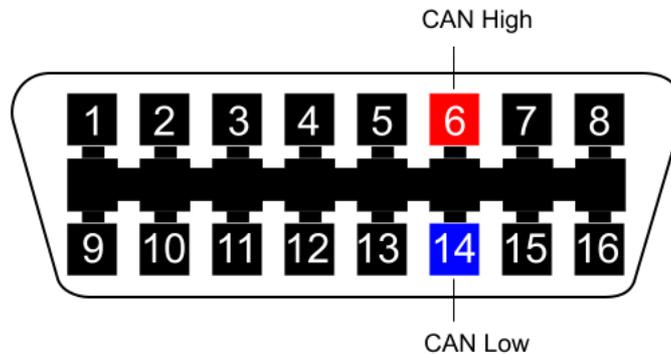

OBDII connector pin	Pin function	AiM cable
6	CAN High	CAN+
14	CAN Low	CAN-

3

AiM device configuration

Before connecting the ECU to AiM device, set it up as follows:

- Run Race Studio 2 software and follow this path:
- Device Configuration -> Select the device you are using;
- select the configuration or press "New" to create a new one;
- select ECU manufacturer "Triumph" and ECU Model "Daytona_675";
- transmit the configuration to the device pressing "Transmit".

4

Available channels

Channels received by AiM devices connected to Triumph "Daytona 675" protocol are:

ID	CHANNEL NAME	FUNCTION
ECU_1	ECU_RPM	RPM
ECU_3	ECU_NEUTRAL	Neutral signal
ECU_4	ECU_MIL	Malfunctioning indication lamp
ECU_5	ECU_GEAR	Engaged gear
ECU_6	ECU_THROTTLE	Throttle position
ECU_7	ECU_ENG_TMP	Engine temperature
ECU_8	ECU_IAT	Intake air temperature
ECU_9	ECU_IGN_ADV	Ignition advance
ECU_10	ECU_RPM2	RPM2
ECU_11	ECU_VEH_SPD	Vehicle speed

Technical note: not all data channels outlined in the ECU template are validated for each manufacturer model or variant; some of the outlined channels are model and year specific, and therefore may not be applicable.