
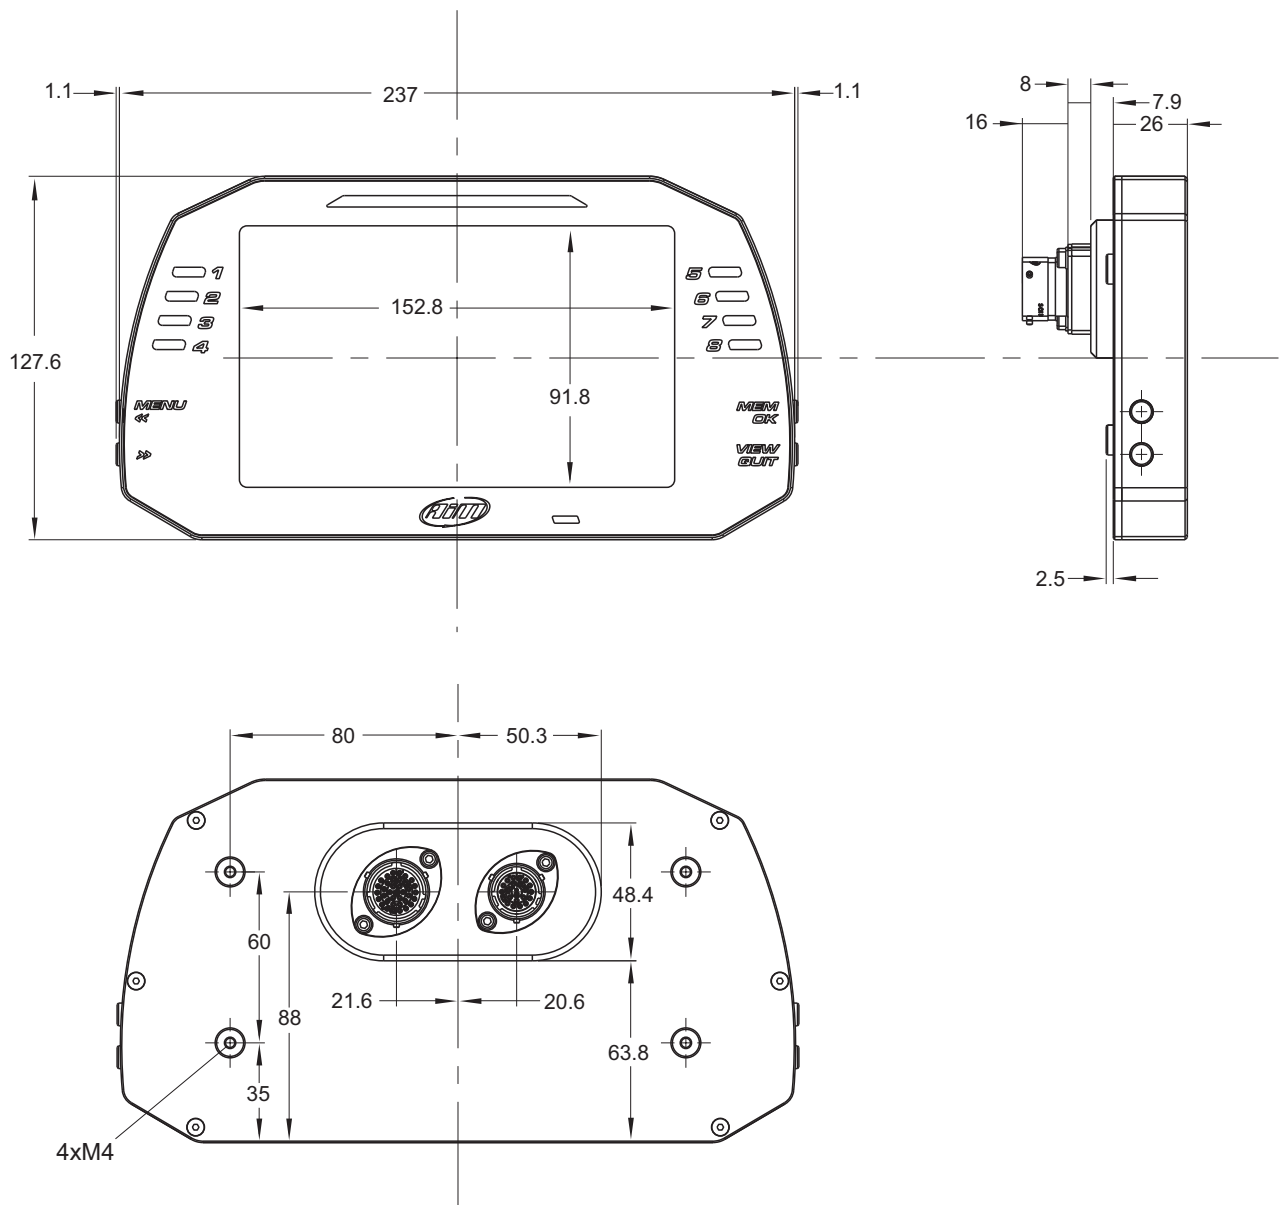


AiM MXG

Dash logger

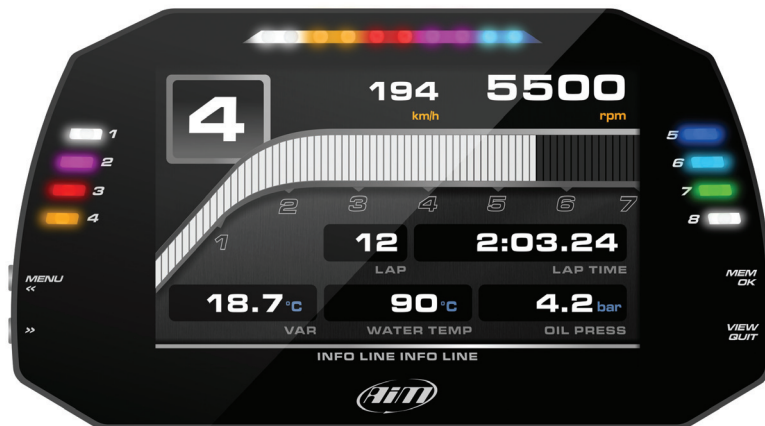

AiM MXG

Dash logger

Technical specifications

Display	7" TFT
Resolution	800x480 pixels
Contrast	1000:1
Brightness	700cd/m2 - 1,100 Lumen
Ambient light sensor	Yes
Alarm LEDs	8 configurable RGB LEDs
Shift Lights	10 configurable RGB LEDs
CAN connections	3
ECU connection	CAN, RS232 or K-Line to 1,000+ industry leading ECUs
External modules	GPS Module, Channel Expansion, Thermocouple Expansion, Lambda Controller, SmartyCam HD
Analog inputs	8 fully configurable, max 1,000 Hz each
Digital inputs	4 Speed inputs, lap signal, coil RPM input
Digital outputs	2 (1 Amp max each)
Second CAN	Yes
Inertial platform	Internal 3 axis $\pm 5G$ accelerometer + 3 axis gyro
Internal memory	4 GB
Body	Anodized Aluminum
Pushbuttons	Metallic
Connectors	2 Motorsport connectors
Dimensions	237x127.6x26 mm
Weight	950 g
Power consumption	400 mA
Waterproof	IP65

AiM MXG

Dash logger

In the box

MXG, GPS Module with cable, USB cable, 37 pins standard harness, Race Studio 3 software

Part numbers

X19MXGGPS130	MXG + GPS Module with 1.30 m cable length
X19MXGGPS400	MXG + GPS Module with 4.00 m cable length

Spare parts

V02573010	37 pins standard harness
X40GPS5B130	GPS Module with 1.30 m cable length
X40GPS5B400	GPS Module with 4.00 m cable length
V02573030	USB adapter
X90TMPC002	USB cable


Optionals

V02573020	22 pins harness
V02573080	22 pins harness with 1 thermocouple
V02573160	22 pins harness with 2 thermocouples
V02573040	37 pins harness with 1 thermocouple
V02573050	37 pins harness with 2 thermocouples
5CN822F00	22 pin female Deutsch connector
5CN837F00	37 pin female Deutsch connector

AiM MXG

Dash logger

Pinout

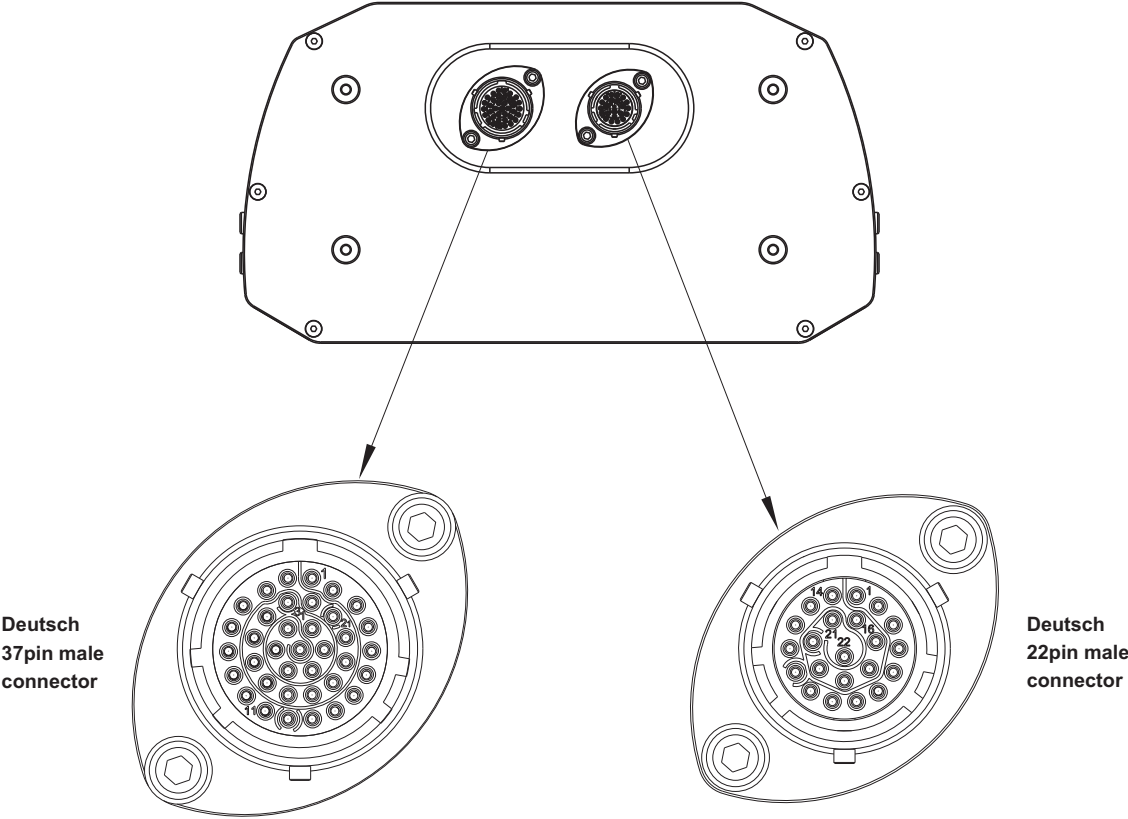

37 pins Deutsch connector pin	Pin function
1	9-15V Power input
2	Battery GND
3	CAN+ Exp
4	GND
5	+Vbattery CAN
6	CAN- Exp
7	+Vbext
8	CAN1+ ECU
9	CAN1- ECU
10	GND
11	K-Line ECU
12	USB D+
13	USB D-
14	GND
15	RPM
16	GND
17	+Vbattery
18	Optical Lap
19	Speed
20	GND
21	+Vbattery
22	Analog Input 1
23	Analog GND
24	+Vbattery
25	+Vreference
26	Analog Input 2
27	Analog GND
28	+Vbattery
29	+Vreference
30	Analog Input 3
31	Analog GND
32	+Vbattery
33	+Vreference
34	Analog Input 4
35	Analog GND
36	+Vbattery
37	+Vreference

22 pins Deutsch connector pin	Pin function
1	Analog Input 5
2	Analog GND
3	+Vbattery
4	+Vreference
5	Analog Input 6
6	Analog Input 7
7	Analog GND
8	+Vbattery
9	+Vreference
10	Analog Input 8
11	Speed 2
12	GND
13	+Vbattery
14	Speed3
15	Speed4
16	GND
17	CAN2+ ECU
18	CAN2- ECU
19	Digital output 1
20	Digital output 2
21	RS232TX
22	RS232RX

AiM MXG

Dash logger

Product history

Rev	From serial number	Date	Changes
Rev04	4201694	May, 24th 2017	▪ TFT-01D: main board ▪ Added correct reading battery voltage value ▪ Compatible with display KYOCERA and DIGIWISE ▪ PXL20F: connectors interface board new ▪ Compatible with TFT-01D for correct reading battery voltage value
Rev03	4201387	May, 15th 2017	▪ TFT-01C: main board ▪ HW modified for correct reading battery voltage value ▪ PXL20F: connectors interface board new ▪ To work with TFT-01C modified
Rev02	4201500	Apr, 11th 2017	▪ TFT-01D: main board ▪ Added correct reading battery voltage value ▪ Compatible with display KYOCERA and DIGIWISE ▪ PXL20E: connectors interface board ▪ HW modified to work with TFT-01D
Rev01	4201218	Nov, 29th 2016	▪ PXL20E: connectors interface board ▪ Added anti crank power stage ▪ Added overvoltage protections on analog inputs ▪ Back mechanical part 05.573.08 rev1, necessary because the new board PLX20E has bigger components



AiM Tech Srl - Via Cavalcanti, 8 20063 Cernusco sul Naviglio, Milan - Italy

Tel. +39.02.9290571 | Fax +39.02.92118024

info@aim-sportline.com | www.aim-sportline.com