



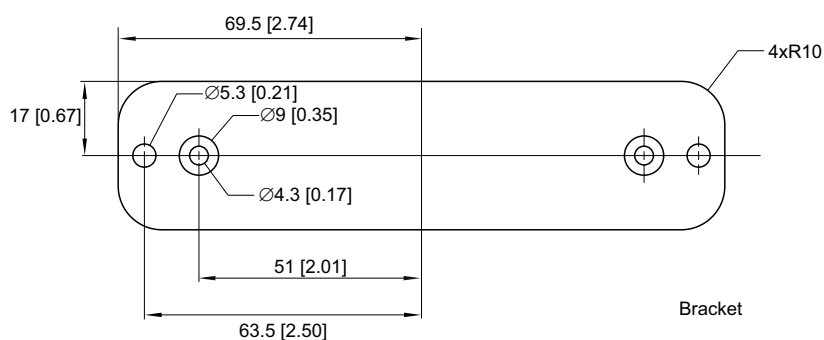
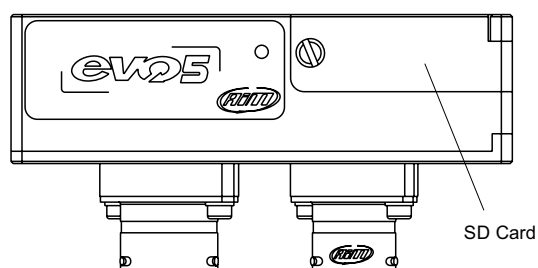


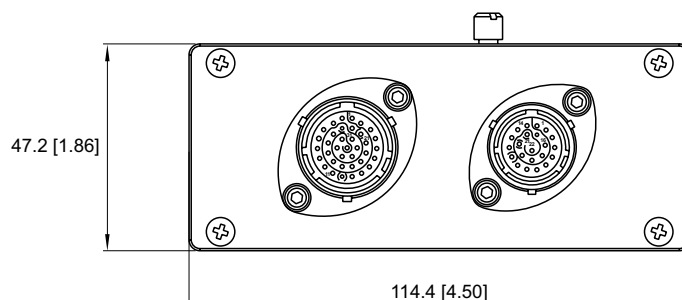

AiM EVO5

Logger

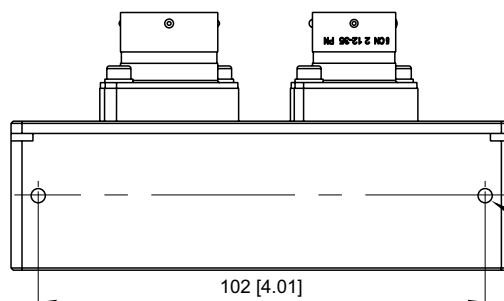



AiM EVO5

Logger

Technical specifications

ECU connection	CAN, RS232 or K-Line to 2,000+ industry leading ECUs
External modules	GPS09 Module, Channel Expansion, TC Hub, Lambda Controller, SmartyCam HD
Analog inputs	8 fully configurable: 0-5V, 0-12V, K thermocouples. Max freq 1 KHz each
Digital inputs	Coil RPM and 4 speed inputs
Inertial platform	Internal 3 axis $\pm 5G$ accelerometer + 3 axis gyro
Digital outputs	2, up to 1 Amp each
Second CAN	Yes
WiFi connection	Yes
Internal memory	4 GB
SD card	Internal: up to 128 Gb
Connectors	2 Motorsport connectors
Body	Anodized Aluminum
LEDs	1 system status
Dimensions	114.4 x 47.2 x 58.8 mm
Weight	300 g
Waterproof	IP65

In the box

EVO5, 37 pin harness, USB cable, GPS09 Module, mounting bracket, Race Studio 3 software CD.

X62EVO5130	EVO5 with GPS09 Module with 1.30 m cable length
X62EVO5400	EVO5 with GPS09 Module with 4 m cable length
X62EVO520R	EVO5 with GPS09 Module Roof version 2 m cable length
X62EVO540R	EVO5 with GPS09 Module Roof version 4 m cable length


Accessories

V02586030	22 pin harness
5CN822F00	22 pins connector
5CN837F00	37 pins connector

Spare parts

V02573200	USB cable
V02586020	37 pin harness

Pinout

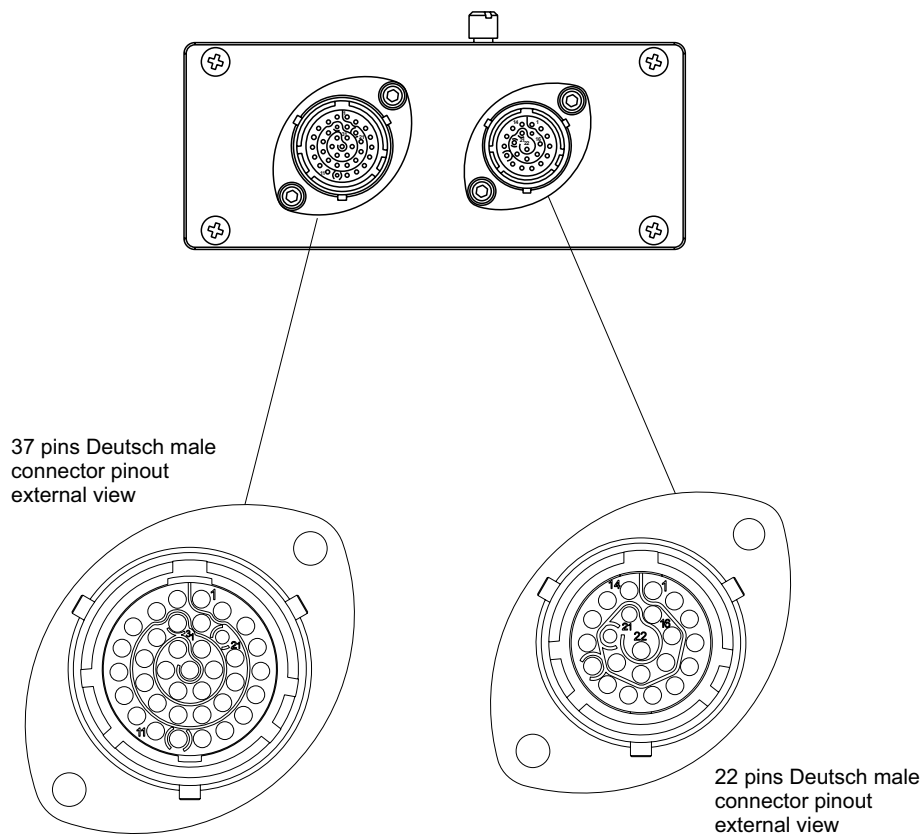

Pin	Function
1	9-15V Power input
2	Battery GND
3	CAN+Exp
4	GND
5	+Vbattery CAN
6	CAN- Exp.
7	+Vbext
8	CAN1+ ECU
9	CAN 1- ECU
10	GND
11	K Line ECU
12	USB D+
13	USB D-
14	GND
15	RPM
16	GND
17	+VBattery
18	Optical Lap
19	Speed1
20	GND
21	+Vbattery
22	Analog Input 1
23	Analog GND
24	+Vbattery
25	+Vreference
26	Analog Input2
27	Analog GND
28	+Vbattery
29	+Vreference
30	Analog Input3
31	Analog GND
32	+Vbattery
33	+Vreference
34	Analog Input4
35	Analog GND
36	+Vbattery
37	+Vreference

Pin	Function
1	Analog Input 5
2	Analog GND
3	+Vbattery
4	+Vreference
5	Analog Input 6
6	Analog Input 7
7	Analog GND
8	+Vbattery
9	+Vreference
10	Analog Input 8
11	Speed 2
12	GND
13	+Vbattery
14	Speed 3
15	Speed 4
16	GND
17	CAN2+ ECU
18	CAN2- ECU
19	Digital output 1
20	Digital output 2
21	RS232TX
22	RS232RX